

RANDOM FISSURED™

Square Lay-in
medium texture

UP TO **71%** RECYCLED CONTENT


Calculate LEED contribution at armstrongceilings.com/greengene

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

\$\$\$

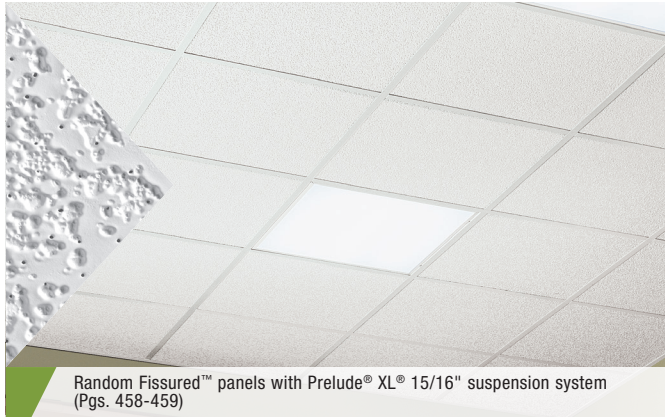


Random Fissured™ panels with Prelude® XL® 15/16" suspension system (Pgs. 458-459)

This economical panel provides standard-to-good sound absorption with a medium-textured visual.

KEY SELECTION ATTRIBUTES

- Excellent sound absorption (perforated options)
- Easy-to-clean, durable surface
- Economical
- 30-Year Limited System Warranty against visible sag, mold, and mildew

COLOR



VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdwgs	Item No.	Dimensions (Inches)
--------------	---	----------	---------------------

RANDOM FISSURED™ (Perforated)

15/16" Square Lay-in	1	2908	24 x 24 x 5/8"
	1	2910	24 x 48 x 5/8"

RANDOM FISSURED (Unperforated)

15/16" Square Lay-in	1	2909	24 x 24 x 5/8"
	1	2911	24 x 48 x 5/8"

RANDOM FISSURED™ (Perforated & Unperforated) Size Capabilities

	Width	Length
15/16" Square Lay-in	Made-to-Order Sizes (3-4 Wks) 5/8" Thick 12" - 30"	12" - 60"

PERFORMANCE

Dots represent high level of performance.

UL Classified Acoustics		Total Acoustics ¹	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Water Repel	Wash	Scrub	Impact	Soil	Recycled Content	Recycle Program	30-Yr Warranty
NRC	+ CAC =														
0.70	N/A	-	Class A	0.72	•	•	-	•	•	•	•	•	-	•	
0.70	N/A	-	Class A	0.72	•	•	-	•	•	•	•	•	-	•	
0.55	N/A	-	Class A	0.72	•	•	-	•	•	•	•	•	-	•	
0.55	N/A	-	Class A	0.72	•	•	-	•	•	•	•	•	-	•	
N/A	N/A	-	Class A	0.72	•	•	-	•	•	•	•	•	-	•	

¹Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Fiberglass with vinyl facing

Surface Finish
Scrubable vinyl film facing (UV protected)

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
2908, 2910 – Type XII, Form 1, Pattern E C
2909, 2911 – Type XII, Form 1, Pattern E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Mold/Mildew Protection
Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Acoustical Details
A CAC value of 37 can be achieved by backloading fiberglass products with item 769 or 770.

Insulation Value
R Factor - 2.6 (BTU units)
R Factor - 0.46 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com

Weight; Square Feet/Carton
0.17 lbs/SF; 128 SF/ctn

Minimum Order Quantity
1 carton, excludes made-to-order panels

Metric Items Available
Items 2908M, 2910M, 2909M, 2911M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



FIBERGLASS